AGPTEK

ICE CLEATS



User Manual

Model: XT-16A

EN: 01-03 IT: 04-06

Please read this [user manual] carefully before use and keep it for future reference.

Warning

1. Please do not use on concrete/wooden floors, cement roads and indoors.
2. Please do not use for ice climbing or glaciers above 3000 meters above sea level.

Using Steps



1. Put on the silicone cover into the front of your shoe and adjust in place.



2. Adjust the back size.



3. Fasten the nylon strap to the side of the shoe cover.



4. Thread the nylon strap into another side and tighten it, then stick the Velcro together.

Specifications

Model	XT-16A
Working Temperature	-40℃~40℃(-40℉~104℉)
Chain Material	304 Stainless steel
Claw Material	420 Stainless steel
Claw Hardness	50HRC
Silicone Material	TPR
Load-bearing	200kg

Maintenance

1. Keep ice cleats clean and dry. After using, do not leave the dirty and wet ice cleats in the storage bag. You should clean up the ice and snow in time to avoid corrosion of the metal after turning into snow water and cause rust.

2. Using the ice cleats for a long time, the tips will become blunt. You should grind them slowly with a file in time. Please do not use an electric grinding wheel, because the high temperature generated by the electric grinding wheel will change the steel of the ice cleats.

3. Please do not heat ice cleats, as the strength and durability of ice cleats will be damaged.


4. The ice cleats are sharp, be careful when storing and using, to avoid get injured.

Leggere attentamente questo [Manuale d'Uso] prima dell'uso e conservarlo per riferimento futuro.

Avviso

1. Non utilizzarlo su pavimenti in cemento, pavimenti in legno, strade in cemento e spazi interni.
2. Non utilizzare per l'arrampicata su ghiaccio professionale o per l'arrampicata ad altitudini superiori a 3000m.

Passi per l'utilizzo

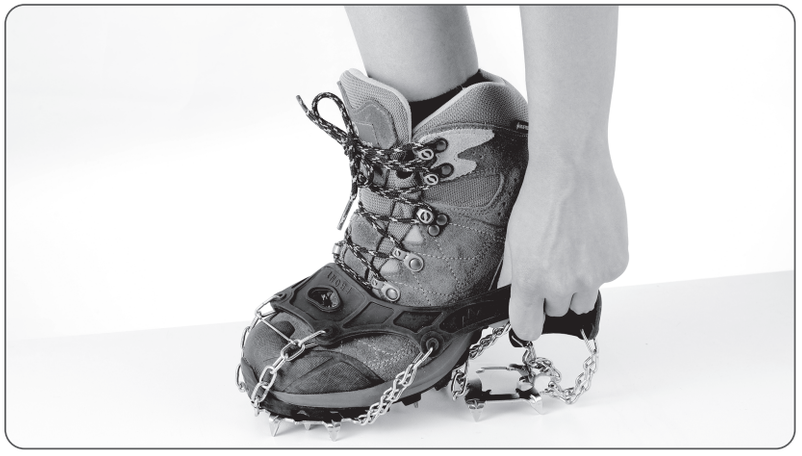

1. Indossare il coperchio in silicone nella parte anteriore della scarpa e regolarlo in posizione.



2. Regolare la misura della parte posteriore.



3. Fissare la cinghia di nylon al lato della scarpa.



4. Infilare la cinghia di nylon in un altro lato e stringerla, quindi attaccare il velcro.

Specifiche

Modello	XT-16A
Temperatura di lavoro	-40℃~40℃
Materiale della catena	Acciaio inox 304
Materiale dell'artiglio	Acciaio inox 420
Durezza dell'artiglio	50HRC
Materiale del silicone	TPR
Portante	200kg

Manutenzione

1. Mantenere i tacchetti da ghiaccio puliti e asciutti. Dopo l'uso, non lasciare i tacchetti da ghiaccio sporchi e bagnati nella borsa di stoccaggio. È necessario pulire il ghiaccio e la neve in tempo per evitare la corrosione del metallo dopo la trasformazione in acqua della neve e causare ruggine.

2. Se si utilizzano i tacchetti da ghiaccio per lungo tempo, le punte si smussano. È necessario affilare lentamente le punte con una lima. Non utilizzare la mola elettrica, perché l'alta temperatura generata dalla mola elettrica altera l'acciaio dei tacchetti da ghiaccio.

3. Non riscaldare i tacchetti da ghiaccio per non danneggiarne la resistenza e la durata.

4. I tacchetti da ghiaccio sono affilati, fare attenzione quando si conservano e si usano, per evitare di ferirsi.

Produttore:

Dongguan Shipai Langri Hardware Processing Store

Indirizzo:

Room 101, No. 4, Lane 12, Xiasha Yangwu Nanxindong, Shipai Town, Dongguan City, Guangdong Province

UK | AR CET PRODUCT SERVICE LTD.

Chase Business Centre,39–41 Chase Side London N14 5BP UK


info.cetservice@gmail.com

EC | REP UE Fast Refund GmbH

ue–de@foxmail.com ☎ 49(0)211–97538868

Friedrich–Alfred–Straße 184 Duisburg 47226 Deutschland

UK CA CE RoHS

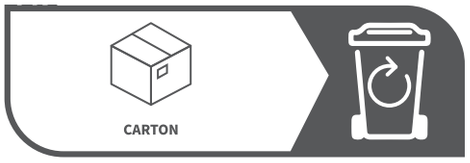

Made In China